

K1C5224V62856TWN A

6

5

4

3

7

10

2


11

1

12

15

13

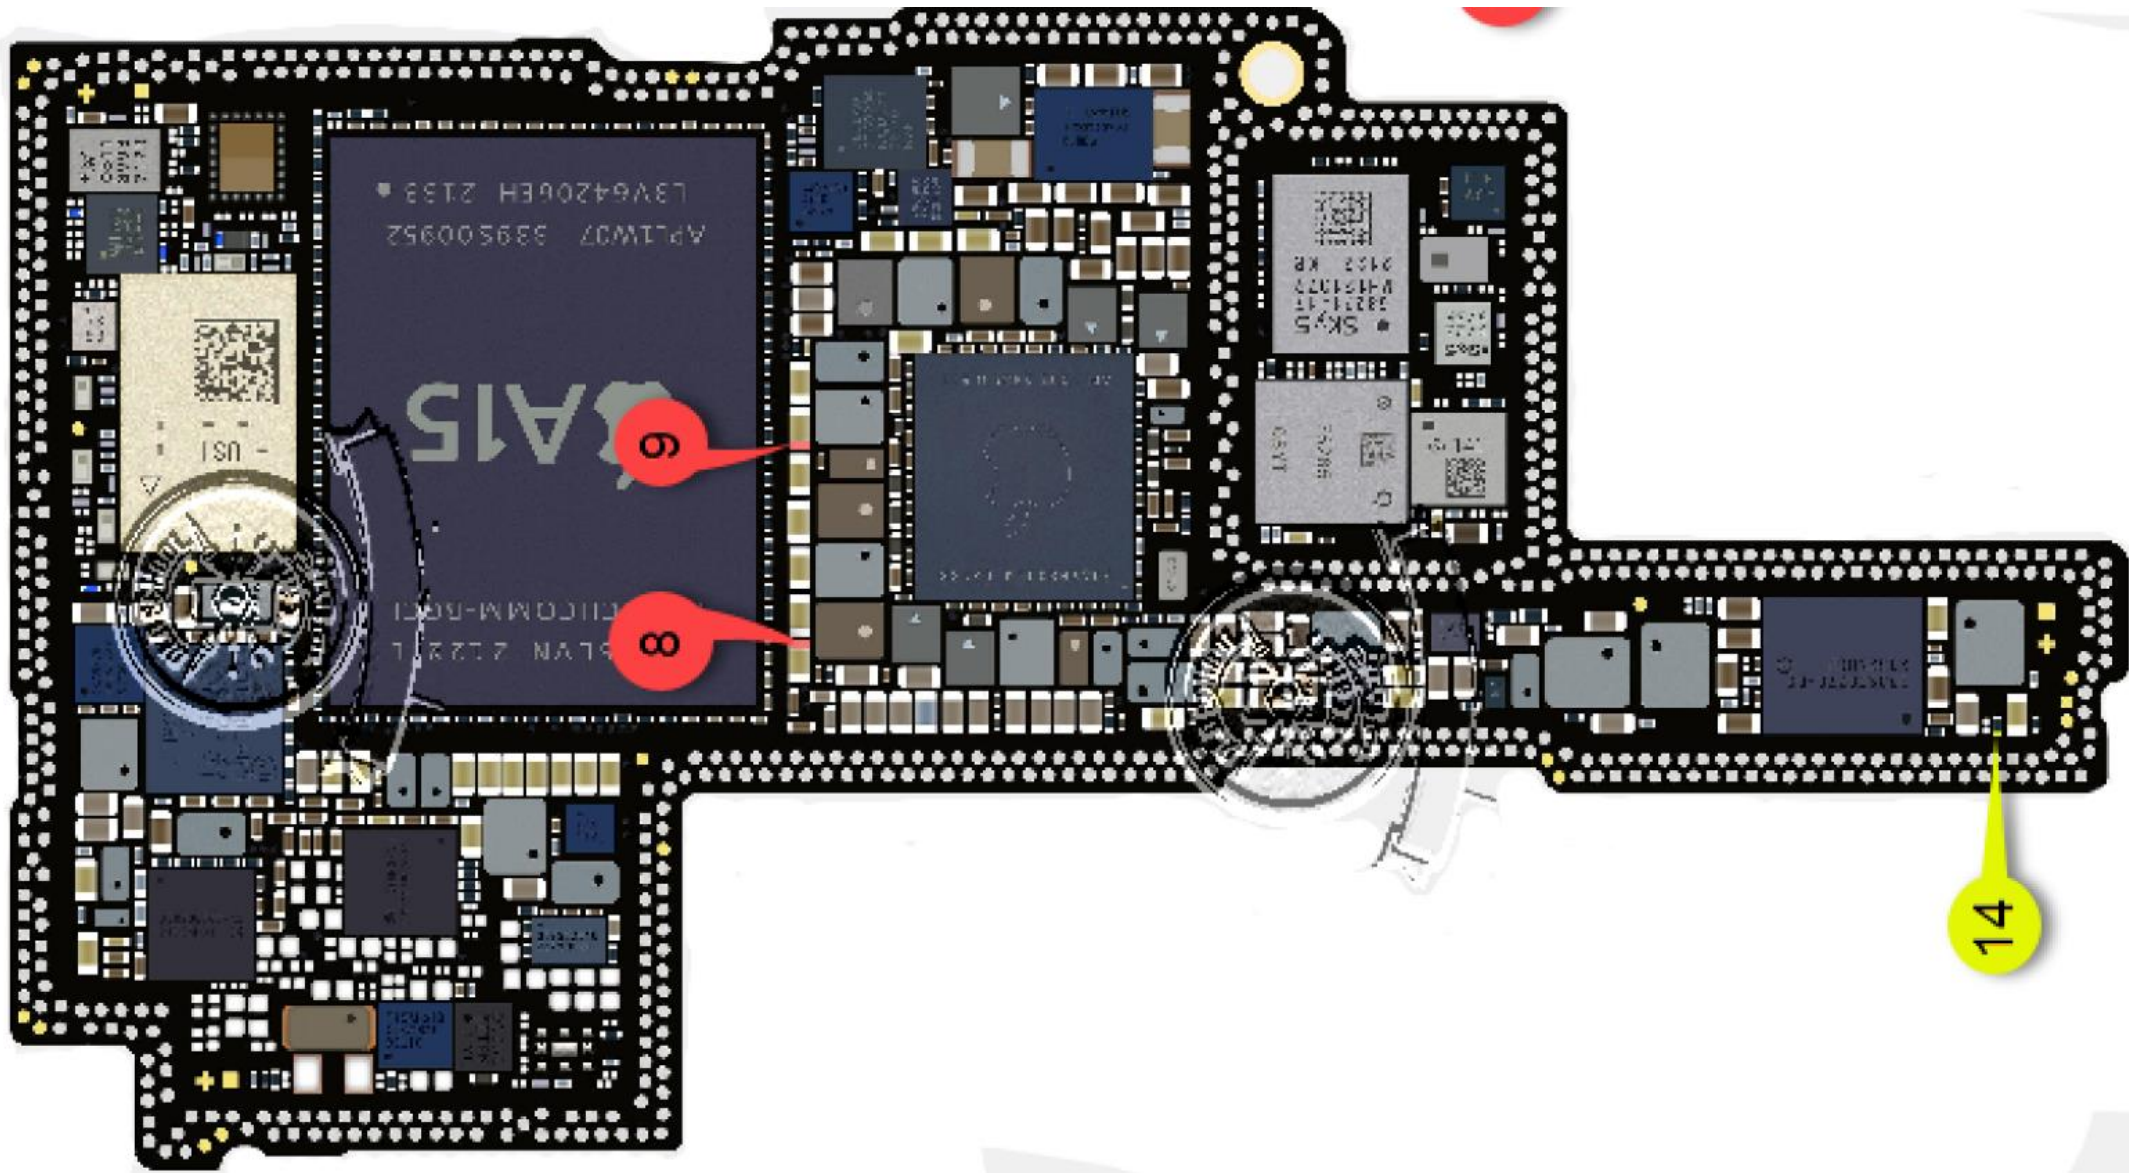

iPhone 13 PRO MAX	Diode	SEQUENCE	COMPONENTE	SMARTCURV %	REMARK
BATT_VCC:	389mV	1	J10000	-	J10000 (5)
PP_VDD_MAIN:	329mV	2	C22750	-	
PP_VDD_BOOST:	379mV	3	C22197	-	U4200
PP_2V63/PP_3V0_NAND:	661mV	4	C22190	-	LDO5
PP_0V83 NAND:	504mV	5	C22180	-	BUCK 12
PP1V2_IO_NAND:	250mV	6	C22172	-	BUCK 3
PP1V8_S2:	285mV	7	C33405	-	SMC PULL, BUCK 3
PP_CPU_PCORE	288mV	8	C11408	-	BUCK1
PP_SRAM_S1:	76mV	9	C11246	-	BUCK 7
PP VUSB1 - E75	1886mV	10	J11200	-	J11200 (49/50)
P PVBUS 2 WIRELESS	477m V	11	C22641	-	VBUS2
PP_1V8_ALWAYS:	1128mV	12	NC22125	-	LDO9
I2C BATTERY SMC:	505mV	13	TP133-1	-	TP133-1
I2C BATTERY SMC:	522mV	14	INTERPOSER	-	INTERPOSER (8)
I2C BATTERY SMC:	1444mV	15	TP132-1	-	TP132-1

SMC - Bloco Power Básico (TÉCNICA B.A.M.B.U.)

Potência ($V \times I$)

