

6

5

4

3

12

7

10

11


1

13

2

14

15

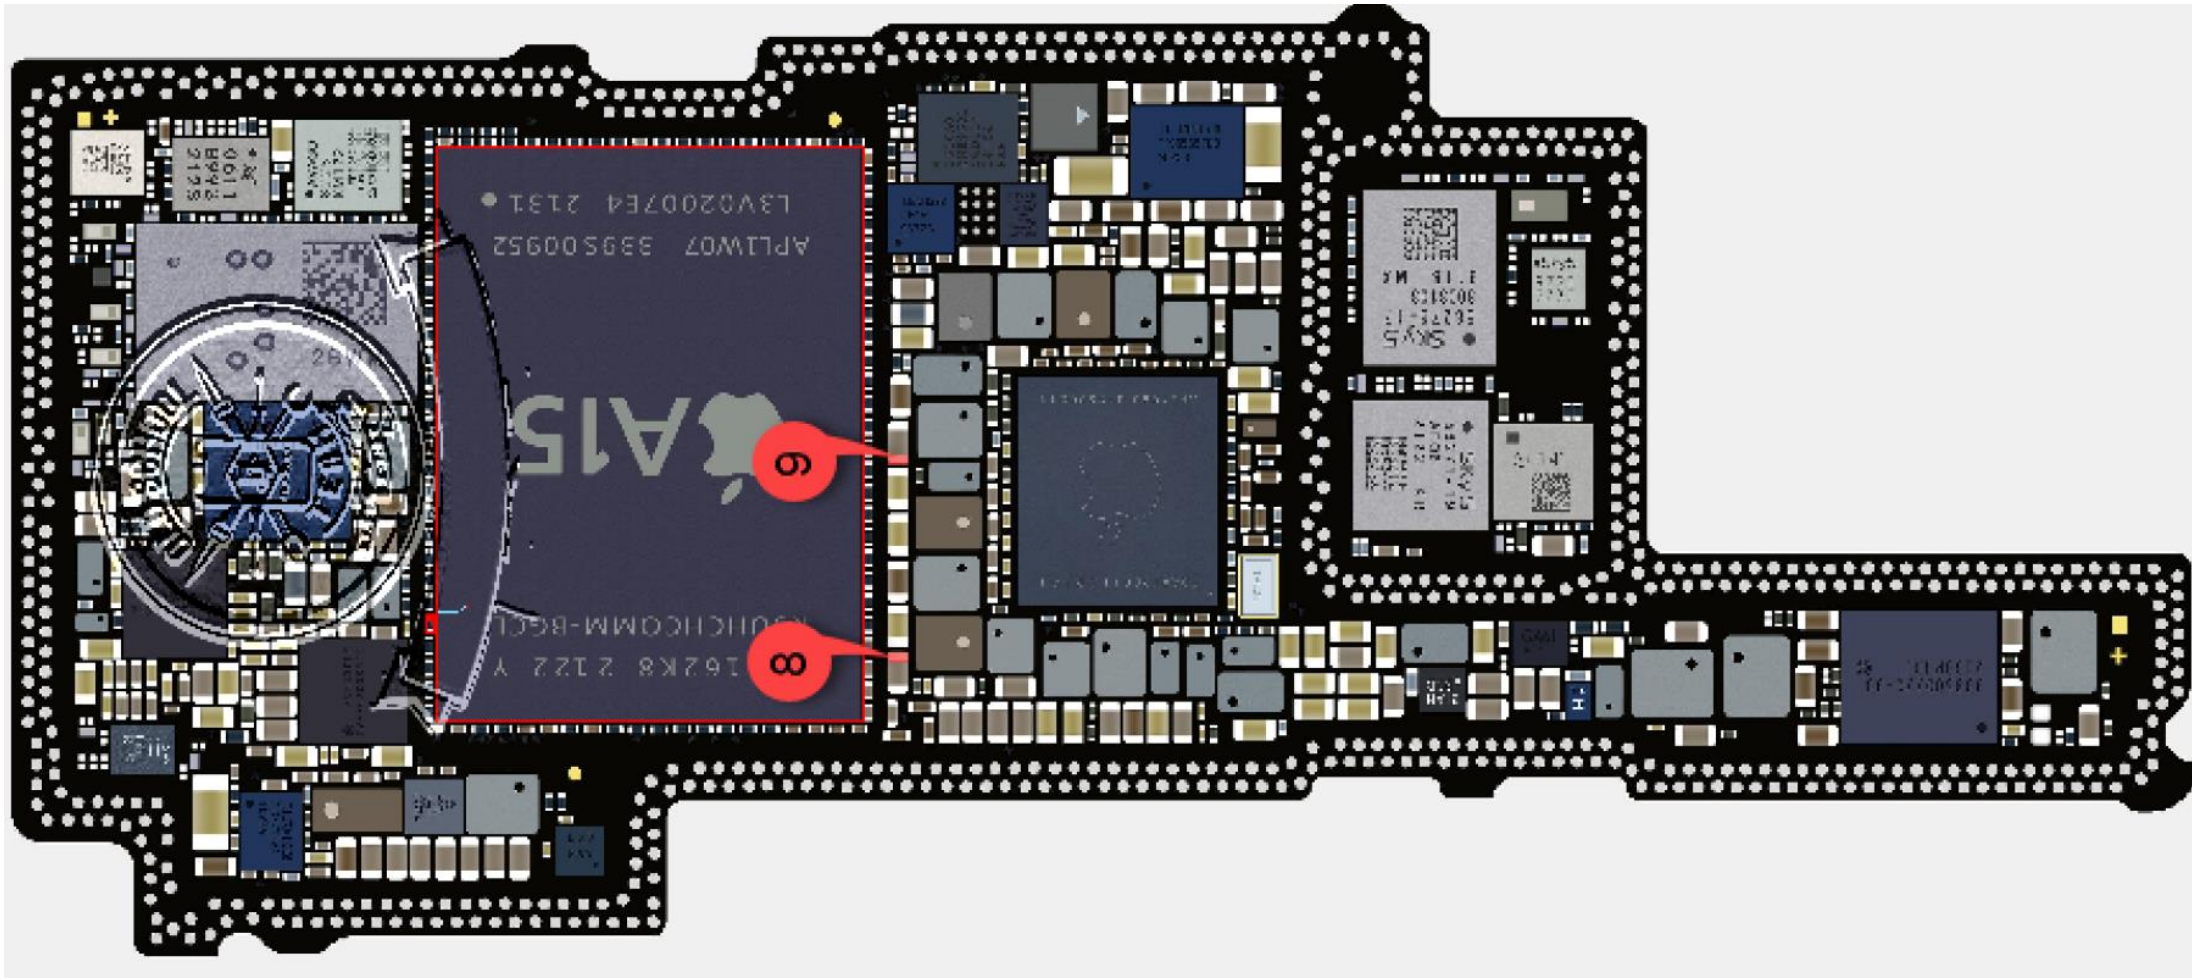



iPhone 13 PRO	Diode	SEQUENCE	COMPONENTE	SMARTCURV %	REMARK
BATT_VCC:	396mV	1	J10000	-	J10000 (5)
PP_VDD_MAIN:	329mV	2	C5531	-	
PP_VDD_BOOST:	364mV	3	C55700	-	U4200
PP_2V63/PP_3V0_NAND:	657mV	4	C55707	-	LDO5
PP_0V83 NAND:	519mV	5	C55716	-	BUCK 12
PP1V2_IO_NAND:	237mV	6	C55715	-	BUCK 3
PP1V8_S2:	728mV	7	C55422	-	SMC PULL, BUCK 3
PP_CPU_PCORE	118mV	8	C33127	-	BUCK1
PP_SRAM_S1:	76mV	9	C33394	-	BUCK 7
PP VUSB1 - E75	1897mV	10	J11200	-	J11200 (49/50)
P PVBUS 2 WIRELESS	490m V	11	C55166	-	VBUS2
PP_1V8_ALWAYS:	1128mV	12	NC55691	-	LDO9
I2C BATTERY SMC:	505mV	13	TP77157	-	J10000 (4)
I2C BATTERY SMC:	544mV	14	J10000	-	J10000 (3)
I2C BATTERY SMC:	OL	15	J10000	-	J10000(1)

